



POLARIS Remote 15"

Features

- Easy front panel fitting
- Graphic-capable TFT colour display
- Easy wiring
- Connection of standard PCs in non-hazardous areas
- Optional touchscreen
- Transmission through fibre optical waveguide or copper
- OSD menu, with setting keys on the front
- Reduction in costs by cascading several POLARIS remote devices to one PC

Description

The POLARIS Remote 15" unit is a display with keyboard and mouse with which a PC can be operated in safe areas of hazardous areas.

Distances of up to 10,000 m are possible.

POLARIS Remote 15" offers the user the possibility of using any currently available PC-based process control system, without any restrictions in the Ex area.

The front panel installation assures ease of mounting. Upon request, the devices are also available as turn-key system solutions in a stainless steel enclosure as wall, floor or ceiling mounting versions.

The screen of the Remote 15" is a TFT display with an XGA resolution and is characterised by its excellent brilliance and a very large reading angle.

Intrinsically safe input devices can be connected also. Optionally, a touchscreen (intrinsically safe), assuring an absolutely maximum operator convenience, is available.

Connection in the safe area is realized via a local unit. (Included in delivery)

Explosion protection

Ex protection type

ATEX Ex II 2G Ex eb qb [ib op pr] IIC T4
Ex II 2D Ex tb IIIC T120°C IP 6X

Certification

IBExU 05 ATEX 1117 X

IECEx Ex db eb qb [ib] IIC T4
Ex tb IIIC T120°C IP 6X

Certification

IECEx IBE 11.0007 X

Further approvals

INMETRO, GOST-R

Protection class

IP 65 (front side)
IP 54 (rear side)

Technical data

Construction

Front panel fitting

Display

- 15" graphic-capable TFT colour display
- 262,144 million colours
- XGA resolution 1024 x 768 pixels
- Brightness 350 cd/m²
- Visible area approx. 304 x 228 mm
- Contrast 400:1
- Antireflection coating glass pane
- Optional touchscreen

Backlight illumination

- CFL technology
- Service life approx. 50,000 hours (at +25 °C)

Connection to the PC

- Connection to VGA
- PS/2 keyboard und PS/2 mouse port
- via cable STP/S; 4 x 2 x 23 AWG optionally via fibre optic

Requirement to the base station

Keyboard and mouse with a PS/2connector; VGA connection or graphics card with the following technical data:

- VGA, SVGA, XGA, SXGA resolution
- Vertical sync frequency 60 to 75 Hz

Transmission distance

- bis zu 300 m bei STP/S Kupferkabel
- Up to 400 m via 50 µm multi-mode fibre optic cable
- Up to 10,000 m via 9 µm single-mode fibre optic cable (on request)

Power supply

AC 90 up to 253 V, 50 up to 60 Hz
DC 24 V ± 10 % on request


Max. power consumption

P_{max.} < 60 W



POLARIS REMOTE POLARIS Remote 15"

Possible connection

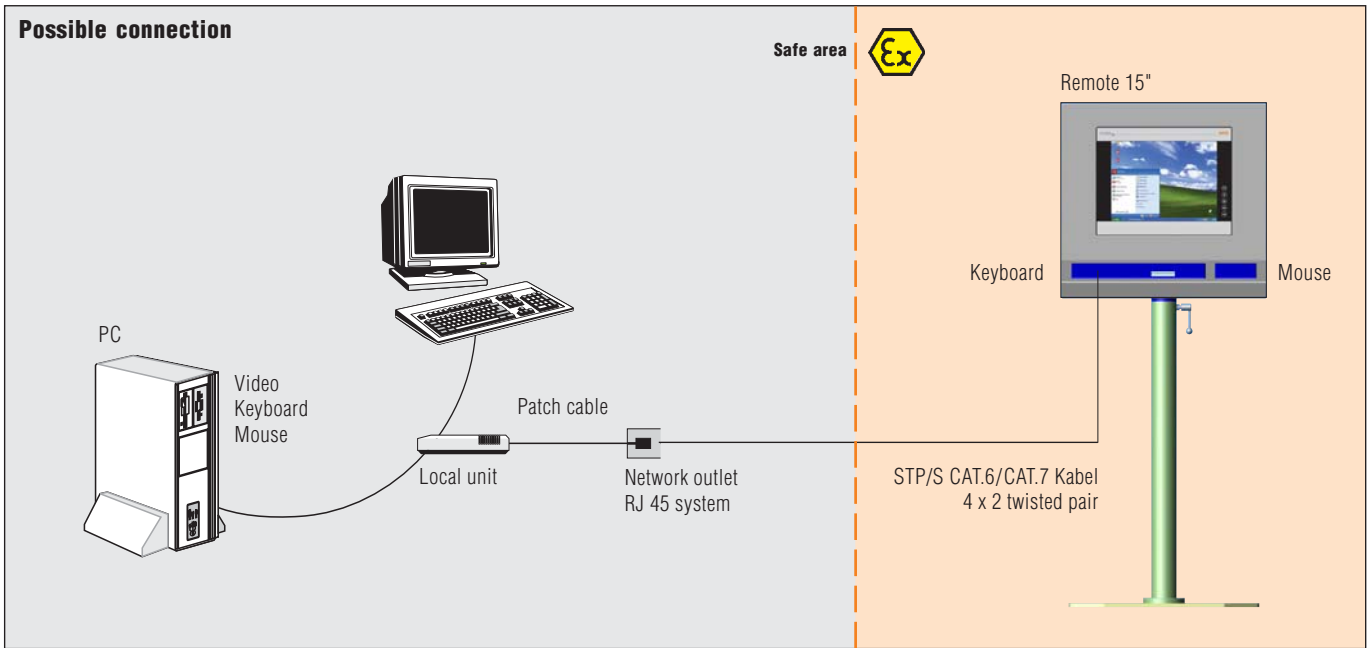

Dimensions (width x height x depth)

411 mm x 332 mm x approx. 135 mm

Wall cut-out

394.5 mm x 315.5 mm + 0.5 mm

Weight

Approx. 23 kg

Admissible ambient temperatures

Storage -20 °C to +50 °C

Operation 0 °C to +50 °C

System solution with heating on request.

Humidity

5 to 95 % non-condensing

Vibration

0.7 G/1 mm; 5 Hz - 500 Hz pulse in all 3 axes

Shock

15 G, 11 ms pulse in all 3 axes

Material

Front Polyester foil on anodised aluminium plate (conditionally UV resistant)
Rear panel galvanised sheet steel bichromated

Selection chart

Version	Code no.	Interface	Code no.
Remote 15" without touchscreen	4	for STP/S copper cable (up to max. 300 m)	00
		for STP/S copper cable (up to max. 300 m) supply module for hand-held scanner*	04
Remote 15" with touchscreen	6	for 50 µm multi-mode fibre optic cable (up to max. 400 m)	08
		for 50 µm multi-mode fibre optic cable (up to max. 400 m), supply module for hand-held scanner*	12

*(not with touchscreen)

➔ **Complete order no. 17-71V2-**

Please insert correct code.

Technical data subject to change without notice.

You will find the accessories with order details on the accessories pages.