



MC 9090^{ex}-K
with 1D-Standard Range Scan Engine

Features

- International approvals for global usability
- WLAN radio standard IEEE 802.11 a/b/g
- Easy battery changing in the Ex area
- Expanded storage capacity with replaceable SD card
- Various versions of replaceable keyboards
- Compatibility with MC9090 from Motorola
- Service contracts

Description

The MC 9090^{ex}-K Mobile Computer is a robust device for reliable barcode scanning in hazardous (potentially explosive) areas.

The scan trigger is positioned in such a way that barcodes can be captured very conveniently. The integrated radio module enables real time data access to your host system.

The MC 9090^{ex}-K combines the strength of Microsoft's Pocket PC platform with the power of the Intel® XScale™ PXA270 processor with 624 MHz.

A further highlight is the large easy-to-read 1/4 VGA color display with touchscreen technology. The MC 9090^{ex}-K is working with the IEEE 802.11a/b/g radio standard (direct sequence).

Market	Applications	Users
Automobile industry (suppliers of paintwork, for paint shops, etc.)	Material flow monitoring Production control Supplier chain management	Dispatch, receiving and stock management departments Personnel who have received instruction on the handling of potentially explosive substances.
Food and beverages (suppliers of aromatic substances, etc.)	Incoming/outgoing goods, inventory management Safety tests	Maintenance and repair Personnel who have received instruction for deployment in potentially explosive areas.
Petrochemicals (from production through further processing to delivery)	Spare parts tracking Maintenance/repair work	Production area Personnel who have received instruction on the handling of potentially explosive substances.
Pharmaceuticals (suppliers of individual components required for production e. g. medication)	Workshop communication Conformity assessment	

➔ **Explosion protection**

ATEX Ex protection type
 ⓧ II 2G Ex q [ib] IIC T4

Certification
 PTB 05 ATEX 2055
 For further details see EC Type Certification.

IECEx Ex protection type
 Ex q [ib] IIC T4

Certification
 IECEx PTB 08.0012
 For further details see IECEx Certificate of Conformity.

- Other variants are available for:
- Brazil, Japan, Canada, Russia, South Africa and USA
 - Mining EU

➔ **Technical data**

Keyboard version
 28, 33, 43 and 53 keys

Display
 3.8", 1/4 VGA colour display with touchscreen 240 x 320 pixels

Barcode options
 SE 950: 1D-Standard Range Scan Engine
 Reading range: 10 cm to 120 cm

Dimensions (height x width x depth)
 231 mm x 91 mm x 59 mm
 9.1 inch x 3.6 inch x 2.3 inch

Weight
 approx. 980 g
 approx. 31 oz

Ambient temperature
 -20 °C to +40 °C
 -4 °F to +104 °F

Storage temperature
 -40 °C to +70 °C
 -40 °F to +158 °F

Charging temperature
 0 °C to +40 °C
 +32 °F to +104 °F

Humidity
 5 % to 95 % (non-condensing)

Protection class (EN 60529)
 IP 54

Processor
 Intel® XScale™ PXA270 processor/624 MHz

Memory
 128/128 MB RAM/ROM with the option of expansion with SD card: 512 MB, 1 GB or 2 GB

Operating system
 Windows Mobile 2005



Mobile Computer MC 9090^{EX}-K for ATEX/IECEx Zone 1

Power supply

Li-ion battery 17-A1Z0-0001
with 7.4 V/2200 mAh
Battery can be changed in the Ex area!

Backup battery

Ni-MH battery (rechargeable)
3.6 V/15 mAh

Interfaces

- RS232
- USB

Application development

SDK available from the Symbol Developer
Central Website

Audio System

Integrated microphone and loudspeaker

The MC 9090^{EX}-K Mobile Computer with the 1D-
Standard Range Scan Engine recognises the
following 1D barcodes:

Code 11	Interleaved 2 of 5
Code 39	MSI
Code 93	UPCA
Code 128	UPCE
Codabar	UPC/EAN supplementals
Coupon Code	Trioptic 39
Chinese 2 of 5	RSS-14
Discrete 2 of 5	RSS Expanded
EAN-8	RSS Limited
EAN-13	Webcode

Wireless data communication (WLAN)

Radio standard

IEEE 802.11a/b/g

Data rate/frequency range

IEEE802.11a: up to 54 Mbit/s - 5 GHz
IEEE802.11b: up to 11 Mbit/s - 2.4 GHz
IEEE802.11g: up to 54 Mbit/s - 2.4 GHz

Output power

100 mW (Germany and International)

Antenna

Integrated in the device

Note

The respective radio frequencies and
usable channels depend on the
country-specific regulations.

Bluetooth (WPAN)

Bluetooth version 1.2 with BT Explorer
(including manager)


Max. data rate

1 Mbit/s

Antenna

Integrated in the device

Connection possibility

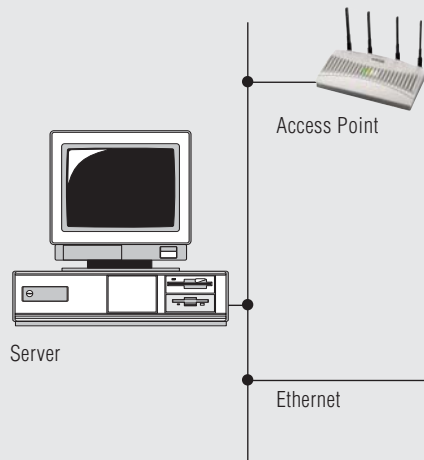

Selection chart

Version	Code no.
28 keys, numeric	A
33 keys, numeric	L
43 keys, alphanumeric	F
53 keys, alphanumeric	E
53 keys with layout for VT emulation	G
53 keys with layout for 3270 emulation	H
53 keys with layout for 5250 emulation	J

➔ **Complete order no. 17-A119-OKA0/HC** **FA600**
MC 9090^{EX}-K with 1D-Standard Range Scan Engine
including Li-ion battery (1 piece)

Please insert correct code. Technical data subject to change without notice.
Note: All variants without accessories.
You will find the accessories with order details on the accessories pages.